

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11) EP 1 029 441 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
23.08.2000 Bulletin 2000/34

(51) Int. Cl.⁷: A01F 15/10, A01F 15/07,
A01F 15/14, A01D 90/06

(21) Application number: 00200031.3

(22) Date of filing: 24.01.2000

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: Ferramola, Virginio
42045 Luzzara, Regio Emilia (IT)

(30) Priority: 17.02.1999 IT RE990022


(74) Representative:
Corradini, Corrado et al
Studio Ing. C. CORRADINI & C. S.r.l.
4, Via Dante Alighieri
42100 Reggio Emilia (IT)

(71) Applicant: Tigieffe - S.R.L.
42045 Luzzara (Regio Emilia) (IT)

(54) Baling machine for pruning residues

(57) A baling machine for pruning residues, comprising a frame (1) mounted on wheels (3) and provided with a drawbar (4) for connection to a tractor, and on which there are provided a unit (12) for gathering pruning residues from the ground, a rearward compacting chamber, and a bale binding unit, said gathering unit comprising at least one transverse lower pronged rotor (17, 18) rotated in the opposite direction to the machine

advancement direction (A), and at least one transverse upper pronged rotor (19, 20) rotated in the opposite direction to the preceding and having its prongs offset from those of the lower rotor, between said two rotors there being defined the channel for feeding the pruning residues to the compacting chamber.

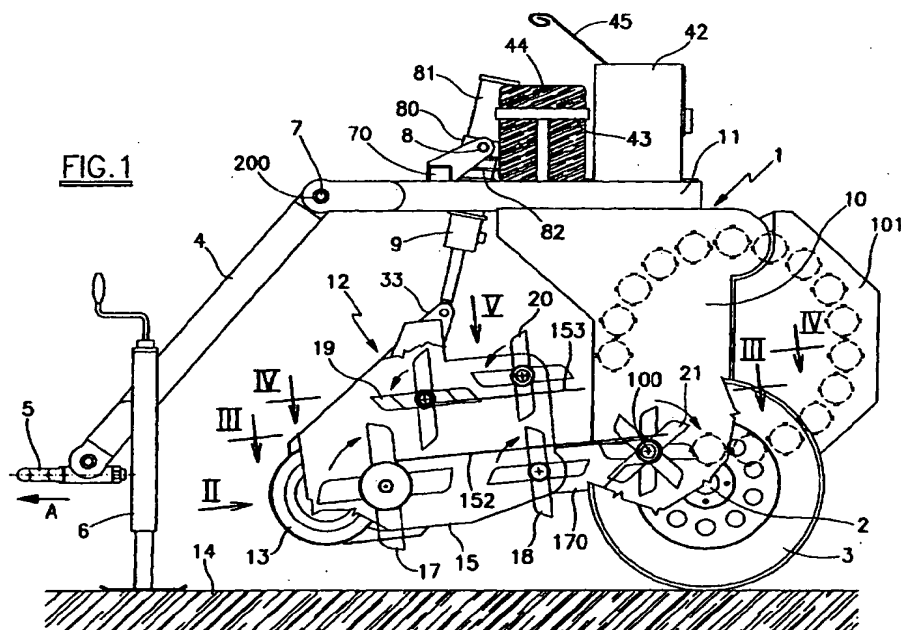

Description

[0001] This invention relates to a baling machine for pruning residues, a typical but not exclusive use of which is in gathering cut-off vine branches.

[0002] During pruning, and in particular during vine pruning, the cut-off branches are left on the ground, to be gathered on termination of pruning.

[0003] This gathering is still done totally by hand, involving lengthy and tiring operations.

[0004] Said pruning residues are usually heaped together on a suitable site and then burned, it being uneconomical to form them into faggots because of the lengthy time and effort required.

[0005] In this sector there is consequently a much felt need for means able to automate this gathering of pruned branches.

[0006] The main object of this invention is therefore to provide a machine able to gather such pruning residues from the ground and to form them into bales usable for heating and other purposes, all within the context of a rational, reliable and robust construction of small overall size.

[0007] This object is attained by a machine having the characteristics defined in the claims.

[0008] In particular, it comprises a towed frame provided at its front with a gathering unit able to swivel in a longitudinal vertical plane in order to occupy a raised rest position for machine transfer along the road, and a lowered working position in which it lies a short distance from the ground, from which it gathers the branches to serve them to a rearward chamber for their compacting and binding.

[0009] Said gathering unit comprises a lower pair of transverse pronged rotors rotating in the opposite direction to the direction of travel, and with which there cooperate an overlying pair of transverse pronged rotors rotated in the opposite direction to the preceding, between said pairs of rotors there being defined a downstream-tapering conveying channel opening into said compacting chamber.

[0010] This latter is of cylindrical shape with its horizontal longitudinal axis positioned transverse to the travel direction, and comprises a fixed front part, and a movable rear part acting as a discharge door for the compacted and bound material.

[0011] Specifically, said cylindrical chamber is defined by a circumferential series of transverse ribbed rollers rotating in the same direction and interrupted at the communication with said chamber.

[0012] With said chamber there are associated means for measuring the pressure attained within it, a unit for binding the compacted mass or bale of branches, a unit for cutting the bale binding means, and a unit for opening and closing said discharge door.

[0013] All the movements involved in gathering the pruning residues and forming them into a bale are linked together and derive from the power take-off of a

tractor via a single cardan shaft, the swivel movements of said gathering unit and said discharge door being controlled by hydraulic units connected to the tractor pump by way of a suitable control distributor.

[0014] In a further advantageous embodiment, said movements derive from a hydraulic motor fed by the hydraulic pump usually present on the tractor.

[0015] All the objects of the invention are attained by virtue of the aforedefined means, by which the pruning residues are gathered automatically, and hence quickly, directly from the ground to be advantageously made available in bales, enabling them to be used either as fuel or, after suitable crushing, as a component for fertilizer, animal feed or wood composite.

[0016] The constructional characteristics and merits of the invention, together with its operation, will be apparent from the detailed description given hereinafter with reference to the figures of the accompanying drawings, which illustrate a preferred embodiment thereof by way of non-limiting example.

Figure 1 is a side view of the invention in its rest configuration.

Figure 2 is a view taken in the direction II of Figure 1.

Figure 3 is a view taken substantially on the plane III-III of Figure 1.

Figure 4 is a view taken substantially on the plane IV-IV of Figure 1.

Figure 5 is a view taken in the direction V of Figure 1.

Figure 6 is a side elevation showing part of the linkage of the invention.

Figure 7 is an opposite side view of the invention showing the remaining part of said linkage.

Figure 8 is a partial plan view from above showing the binding unit of the invention.

Figure 9 is a view taken in the direction IX of Figure 8.

Figure 10 is a partial side view taken in the direction X of Figure 9.

[0017] Said figures, and in particular Figures 1, 2 and 9, show a frame 1 shaped as a portal, the arms (sides) 10 of which are connected lowerly together by an axle 2 provided with wheels 3, and the cross-member 11 of which extends frontwards where it carries, hinged to it, an articulated drawbar 4 provided with an eyelet for coupling to a tractor. The drawbar 4 can be

adjusted in height by locking the hinge 200 in a suitable position.

[0018] Said tractor (not shown) is provided with a usual power take-off and a likewise usual hydraulic pump, for the requirements stated hereinafter.

[0019] As can be seen from Figure 4, said drawbar 4 is provided with a telescopic resting foot 6 for parking the machine when not in use.

[0020] To the rear of the drawbar hinge pin 7, the frame 1 comprises a cross-member 70 to which there is hinged, on the transverse pin 8, a ring 80 slidingly mounted on the body of a hydraulic cylinder-piston unit 9, the rod of which is pivoted to a holed lug 33 projecting upwards from the underlying gathering unit indicated by 12.

[0021] Said ring 80 rests below the edge of an overlying skirt 81 fixed to the top of the cylinder-piston unit 9, an underlying spring 82 being provided to allow the cylinder-piston unit 9 to slide upwards relative to said ring 80 when the independent idle front wheels of said gathering unit 12 encounter roughness on the ground 14.

[0022] As can be seen in Figures 2, 3, 4 and 5, the unit 12 comprises two vertically-lying opposing side plates 15 which support said wheels 13, and are connected together by two overlying frame-shaped flat structures, the lower of which is indicated by 150 (Figures 2, 3 and 5) and the upper by 151 (Figures 2, 4 and 5).

[0023] Each of the two plates 15 is individually connected to a rearward vertical containing plate 16 inclined towards the machine centre and towards the respective side 10 of the frame 1 (see Figures 3 and 5), and lowerly provided (see Figure 1) with a projecting arm 170, which is hinged on the lower transverse axis 100 of the frame 1.

[0024] Above the lower structure 150 and below the upper structure 151 there are fixed two panels 152 and 153 respectively, which cooperate with said plates 15 and 16 to provide a guide and slide channel for the pruning residues which are gathered from the ground 14 and urged along said channel by the means described hereinafter.

[0025] These comprise two lower pronged rotors 17 and 18 which rotate (see Figure 1) in the opposite direction to the machine advancement direction A, and two upper pronged rotors 19 and 20 which rotate in the opposite direction to the preceding.

[0026] All the rotors consist of a shaft provided with a plurality of flat prongs or teeth suitably spaced apart longitudinally and radially, said prongs being suitably offset.

[0027] The first rotor 18, which is the actual gathering rotor, has a greater diameter than the others.

[0028] Said panels 152 and 153 are provided with corresponding passage slots for said prongs; the slots being indicated by 117, 118, 119 and 120 for the rotors 17, 18, 19 and 20 respectively.

[0029] The lower panel 152 has a further series of

slots 121 for passage of the flat prongs of a further rotor 21 positioned at the loading mouth of a compacting chamber for the pruning residues.

[0030] The axis 100 about which the gathering unit 12 swivels coincides with the axis of rotation of said further rotor 21.

[0031] Said compacting chamber is of cylindrical shape with its horizontal axis positioned transverse to the machine longitudinal axis and is formed partly by the sides 10 of the frame 1 and partly by a swivel shell 101 acting as the discharge door for the bales (not shown).

[0032] These latter are formed by a circumferential series of rollers comprising angularly equidistant longitudinal ribs and arranged in the form of a cylindrical surface interrupted at the rotor 21 to form the chamber loading mouth.

[0033] Those rollers associated with the sides 10 of the frame 1 are indicated by 22 and those associated with the door 101 are indicated by 23, the upper roller indicated by 24 being common to said two parts of the compacting chamber and having its shaft acting as the hinge shaft for the door 101.

[0034] Although not shown, it should be noted that on one side of the machine there is provided a cardan shaft, the input end of which is connected to the tractor power take-off and its output end is connected to the shaft which in Figures 6 and 7 is indicated by 25, and provided with suitable safety systems to prevent abnormal forces causing damage to and breakage of the linkage, described hereinafter.

[0035] Alternatively, the shaft 25 can be connected to a hydraulic motor fed by the tractor hydraulic pump via suitable valves.

[0036] On one end of said shaft 25, which is driven to rotate in the direction shown in Figure 6, there are keyed two drive sprockets of different diameter which drive the chains 26 and 28 in the directions indicated by the arrows.

[0037] Specifically, the chain 26 extends endlessly about the smaller-diameter drive sprocket of said shaft 25 and a sprocket keyed onto the shaft of the rotor 21, and is deviated about two chain tensioners indicated by 29.

[0038] The chain 28 extends endlessly about the larger-diameter drive sprocket of the shaft 25 and a sprocket keyed onto the swivel shaft 24 of the door 101, and is deviated about the chain tensioner indicated by 30.

[0039] On said shaft 24 there is keyed a second drive sprocket of diameter less than the preceding, provided for driving a chain 27 extending endlessly about the sprockets keyed onto the rotation shafts of those ribbed rollers 22 associated with the fixed part of the compacting chamber, and deviated about the chain tensioner indicated by 31.

[0040] The rollers 23 associated with the door 101 of the compacting chamber are driven by the drive chain

shown in Figure 7 and indicated by the reference numeral 32.

[0041] This extends endlessly about a drive sprocket keyed onto the opposite end of the shaft 24 and the sprockets keyed onto the rotation shafts of the ribbed rollers 23, and is deviated about a chain tensioner indicated by 34.

[0042] In Figure 7 it can be seen that on the opposite end of the rotor 21 there is keyed a drive sprocket for a chain 35 which extends endlessly about said drive sprocket and a sprocket keyed onto the rotation shaft of the rotor 18, and is deviated about the chain tensioner indicated by 36.

[0043] As can be seen in Figure 6, on the opposite end of the shaft of said rotor 18 there is keyed a drive sprocket for driving the chain indicated by 37.

[0044] This latter extends endlessly about said drive sprocket, a driven sprocket keyed onto the rotation shaft of the rotor 17, and an idle sprocket 39 supported by the plate 15, and is deviated about a sprocket keyed onto the rotation shaft of the rotor 19 and about a chain tensioner indicated by 130.

[0045] On the shaft of the rotor 19 there is also keyed a further drive sprocket of diameter less than the preceding. A chain 40 extends endlessly about this drive sprocket and about a sprocket keyed onto the rotation shaft of the rotor 20, and is deviated about the chain tensioner 38.

[0046] It should be noted that the aforescribed chain linkage is contained in a suitable safety and protection casing, not shown for reasons of simplicity and clarity.

[0047] With reference to Figure 10 it can be seen that the compacting chamber discharge door 101 is opened by two opposite hydraulic cylinder-piston units 41 hinged lowerly on respective pins 141 (see Figures 3 to 5) fixed to the sides 10 of the frame 1 and hinged upperly on pins 142 rigid with said door 101.

[0048] Said cylinder-piston units 41 are controlled by an electrical or lever-operated hydraulic distributor positioned on the tractor dashboard.

[0049] Before said door 101 is opened, the bale of branches is bound by the means described hereinafter with reference to Figures 8 to 10.

[0050] Said means are contained in a cowling 42 positioned on the cross-member 11 of the frame 1, behind a holder 43 containing reels 44 of thread 45 in the form of a cord of natural or synthetic material (see Figure 1).

[0051] With reference to Figures 8 to 10, these means comprise a through-rod horizontal hydraulic cylinder-piston unit 46 connected to the hydraulic distributor located on the tractor dashboard and extending transverse to the machine travel direction A.

[0052] The through rod of the cylinder-piston unit 46 is fixed to the roof of the cowling 42, the body of the unit 46 being provided with a rack bar 47 which engages an underlying toothed sector 48.

[0053] Said sector 48 is fixed to a longitudinal spindle 149 rotatably mounted on said cowling 42 and rigidly carrying a guide tube 49, known as a needle, through which the thread 45 passes freely.

5 [0054] During bale formation, said thread guide tube 49 occupies the horizontal position shown by full lines in Figure 9, with a length of thread 45 hanging freely from the free end of it.

[0055] With the tube 49 there is associated a cutting unit comprising a disc blade 50 of vertical axis, positioned immediately above the cross-member 11 of the frame 1 and below the free end of the tube 49 when this is stationary in its horizontal position as stated.

10 [0056] Said blade 50 is keyed onto the output shaft of a right angled transmission system 51, the input shaft of which is driven by a belt 53 deriving its movement from a step-down gear 125 driven by the shaft 25 (Figures 6, 9).

15 [0057] With said blade 50 there is also associated a member for retaining the thread 45 during cutting, this member comprising a block 54 (see Figure 10) which in that side facing said blade 50 comprises a cross-shaped recess.

20 [0058] The vertical groove of said cross-shaped recess, which is less deep than the horizontal groove, is arranged to receive and retain the thread 45 at the moment of cutting, whereas the horizontal groove receives the facing part of the blade 50.

25 [0059] The block 54 is fixed to a projecting appendix 55 hinged, on the transverse horizontal axis indicated by 56 in Figure 10, to the rear wall of the cowling 42.

30 [0060] The block 54 is able to occupy an inactive position (to the right in Figure 10) in which it enables the thread to run freely downwards and follow the swing movements of the tube 49, and an active position (to the left in the figure) in which it operates as stated, with the tube 49 at that moment stationary.

35 [0061] Said active and inactive positions of the block 54 are determined by a fork 59 which is fixed to said appendix 55, and between the arms of which there is inserted, with clearance, a peg 58 fixed to the spindle 149 in a position perpendicular to the thread guide tube 49.

40 [0062] Because of said clearance, the fork 59 is virtually insensitive to the usual oscillation to which the peg 58 is subjected during bale formation, whereas the said fork 59 undergoes a large swing when the tube 49 becomes positioned horizontally on termination of binding, with the block 54 facing the blade 50.

45 [0063] Finally, although not shown it should be noted that the invention also comprises a pressure gauge associated with the compacting chamber, preferably of adjustable type, and at least one warning device able to warn the operator when the bale has attained the chosen compactness.

50 [0064] Said warning device can be an acoustic or visual device, both being preferably provided.

55 [0065] The invention operates in the following man-

ner.

[0066] At the commencement of operations the compacting chamber is closed, a length of thread 45 hangs from the tube 49 which is stationary in the horizontal position shown in Figure 9, the front wheels 13 rest on the ground 14, and the ribbed rollers 22 and 23 rotate as shown, as do the rotors 17-21, with the teeth or prongs of the front lower rotor 17 grazing said ground 14 from which they gather the pruning residues.

[0067] Before reaching the operating chamber said residues assume the form of a layer by the combined action of the rotors 17-20 and the narrow passage provided by the containing plates 16, and are then served to the entry rotor 21 which in combination with the ribbed rollers 22 and 23 spirally rotates the entering branches to consequently form a cylindrical bale.

[0068] When the bale has been formed and has attained the required compression, the operator halts the tractor to enable that mass of branches at that moment lying between the front lower rotor 17 and the chamber compartment to enter this latter.

[0069] After this the operator operates the cylinder-piston unit 46, by which the block 54 withdraws from the blade 50 and the tube 49 descends to insert into the chamber that thread portion projecting from the tube.

[0070] Said thread portion then becomes entangled with the branches of the rotating bale, which unwinds the thread 45 from the reel 44, to wind it as a spiral about the bale by the combined effect of the rotary movement of the bale and the swinging movement of the thread guide tube 49.

[0071] After this, the operator halts the cylinder-piston unit 46, by which the tube 49 becomes horizontal, and at the same time the block 54 approaches the blade 50 to offer the thread 45 to it, which is then cut as already explained.

[0072] Finally, the operator extends the cylinder-piston units 41 to discharge the bound bale, then retracts them to close the operating chamber, after which he restarts the tractor to commence a new pruning residue gathering and compacting operation.

[0073] The invention is not limited to that illustrated and described, but includes all its technical equivalents and their combinations, if implemented within the context of the following claims.

Claims

1. A baling machine for pruning residues, comprising a frame (1) mounted on wheels (3) and provided with a drawbar (4) for connection to a tractor, and on which there are provided a unit (12) for gathering pruning residues from the ground, a rearward compacting chamber, and a bale binding unit, characterised in that said gathering unit comprises at least one transverse lower pronged rotor (17, 18) rotated in the opposite direction to the machine advancement direction (A), and at least one transverse upper pronged rotor (19, 20) rotated in the opposite direction to the preceding and having its prongs offset from those of the lower rotor, between said two rotors there being defined the channel for feeding the pruning residues to the compacting chamber.
2. A machine as claimed in claim 1, characterised in that the gathering unit comprises a pair of lower pronged rotors (17, 18) and a pair of upper pronged rotors (19, 20).
3. A machine as claimed in claim 1, characterised in that said channel comprises two opposing side walls (15, 16) supporting said two pairs of rotors, a first flat panel positioned immediately below the axes of the upper pair of rotors, and a second flat panel positioned immediately above the axes of the lower pair of rotors, said panels being provided with slots for passage of the teeth or prongs of the respective rotors.
4. A machine as claimed in claim 1, characterised in that said gathering unit is hinged at its rear to the lower edge of the entry mouth of said compacting chamber.
5. A machine as claimed in claim 1, characterised in that with said lower pair of rotors there is associated a third pronged rotor (21) which rotates in the same direction thereas and is positioned on the same axis as that on which the gathering unit is hinged to the frame.
6. A machine as claimed in claim 1, characterised in that said compacting chamber is of cylindrical shape, with its horizontal axis positioned transverse to the machine longitudinal axis, and comprises a fixed front part and a movable rear part acting as a door for discharge of the bales.
7. A machine as claimed in claim 1, characterised in that said frame is shaped as a portal, with its interior bay providing said fixed chamber part and to its cross-member there being hinged said movable chamber part acting as the door.
8. A machine as claimed in claim 6, characterised in that said movable part acting as the door is opened and closed by a pair of opposite lateral hydraulic cylinder-piston units.
9. A machine as claimed in claim 6, characterised in that the operative compartment of said chamber is defined by a circumferential series of equidistant ribbed rollers rotating in the same direction, the series being interrupted at the connection to said residue guide and conveying channel.

10. A machine as claimed in claim 1, characterised in that the binding unit comprises a thread guide tube which swings in a vertical plane parallel to the forming chamber axis and receives the thread from an upstream reel to feed it to the forming chamber, and means, positioned in one of the tube end-of-swing positions, for cutting the thread downstream of the tube.
11. A machine as claimed in claim 10, characterised in that said cutting means comprise a circular blade positioned in proximity to said thread and associated with a block linked to the control system for said tube in such a manner that when the tube swings, the block is spaced from the blade, whereas when the tube is stationary the block urges the thread into contact with the blade cutting profile.

20

25

30


35


40


45

50

55

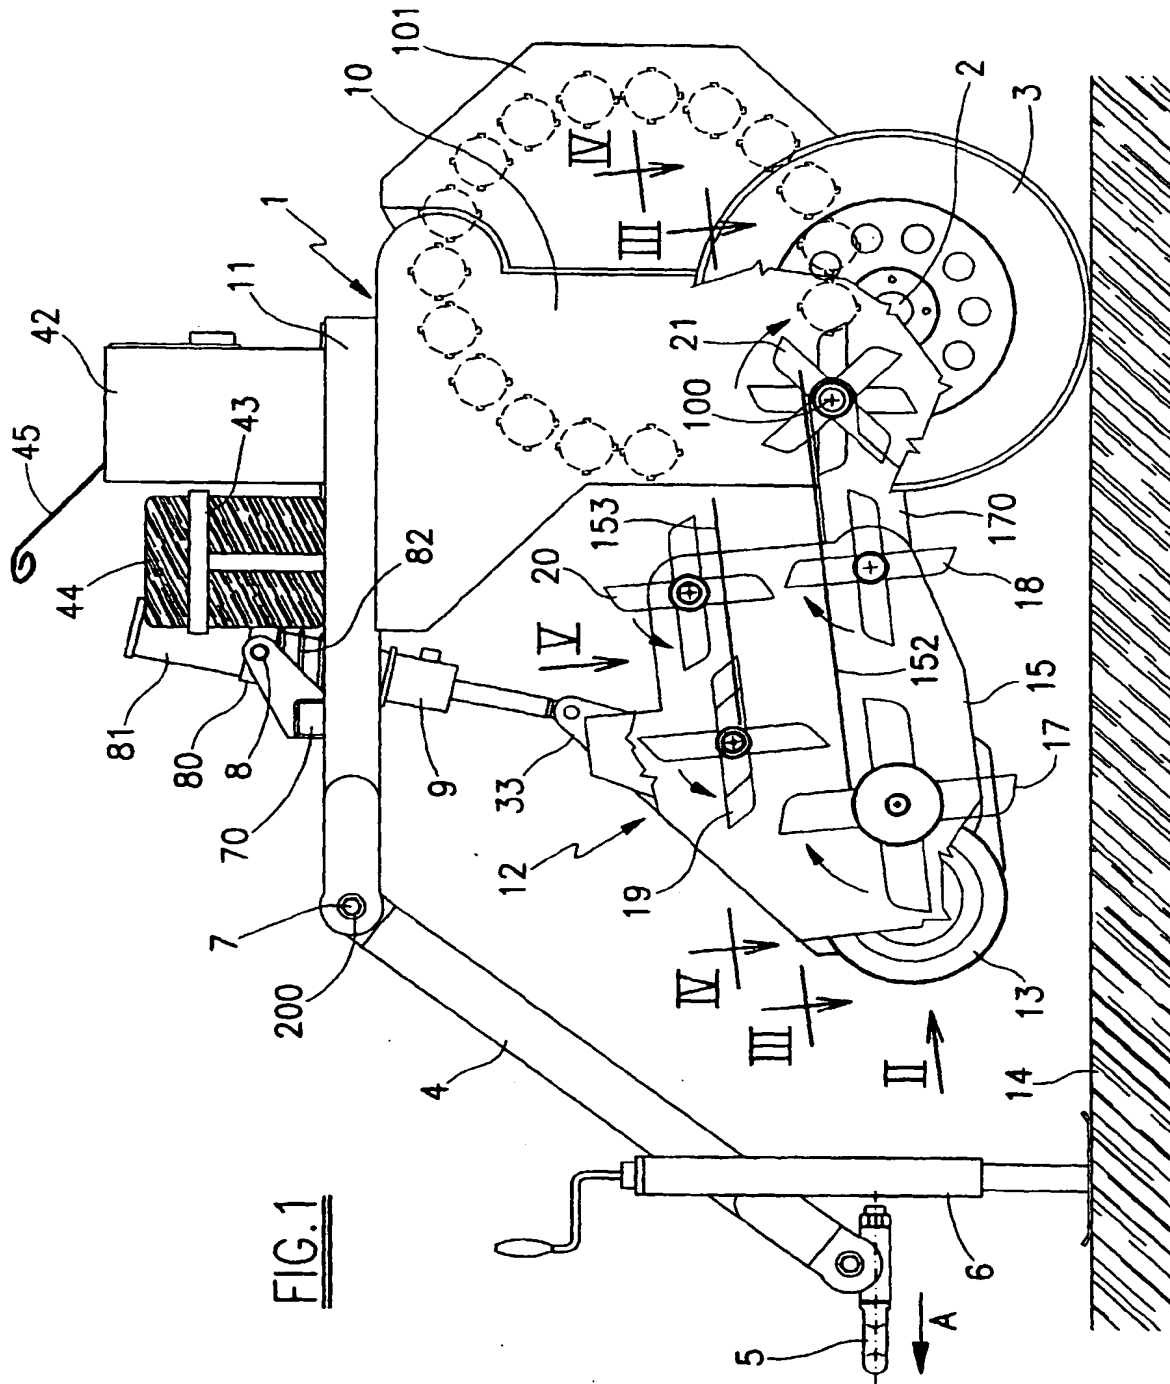

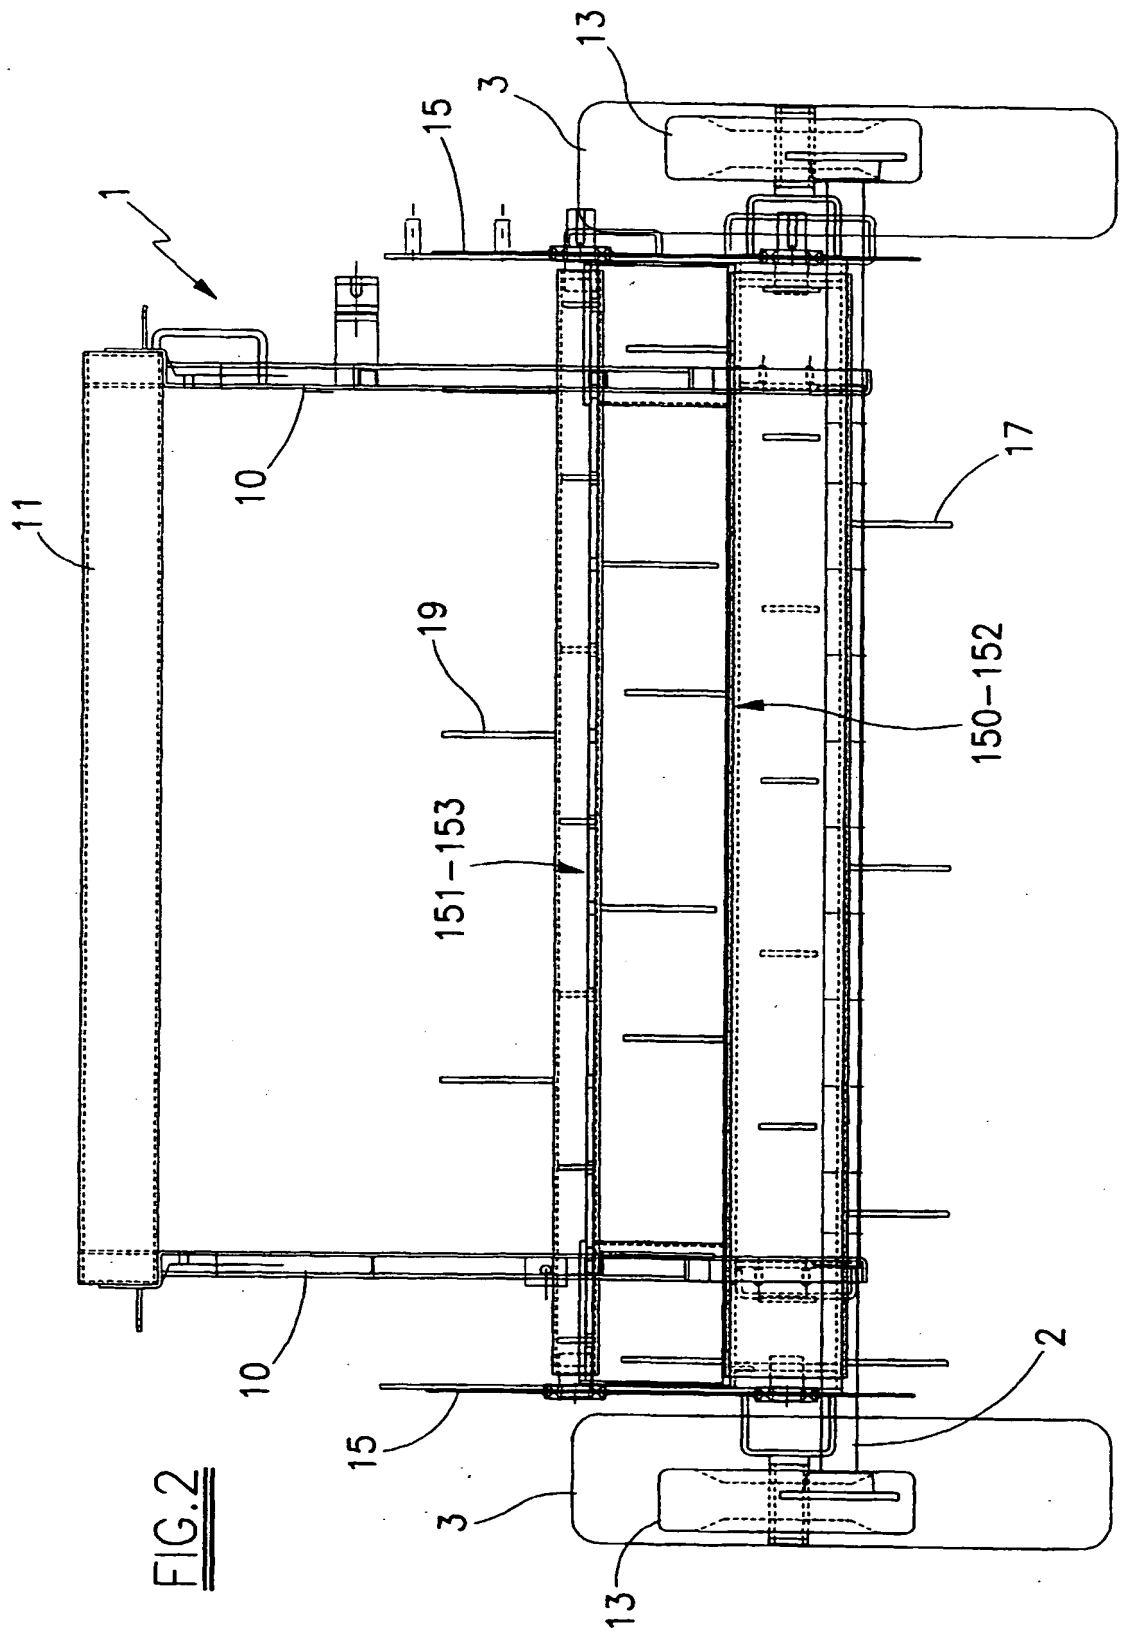

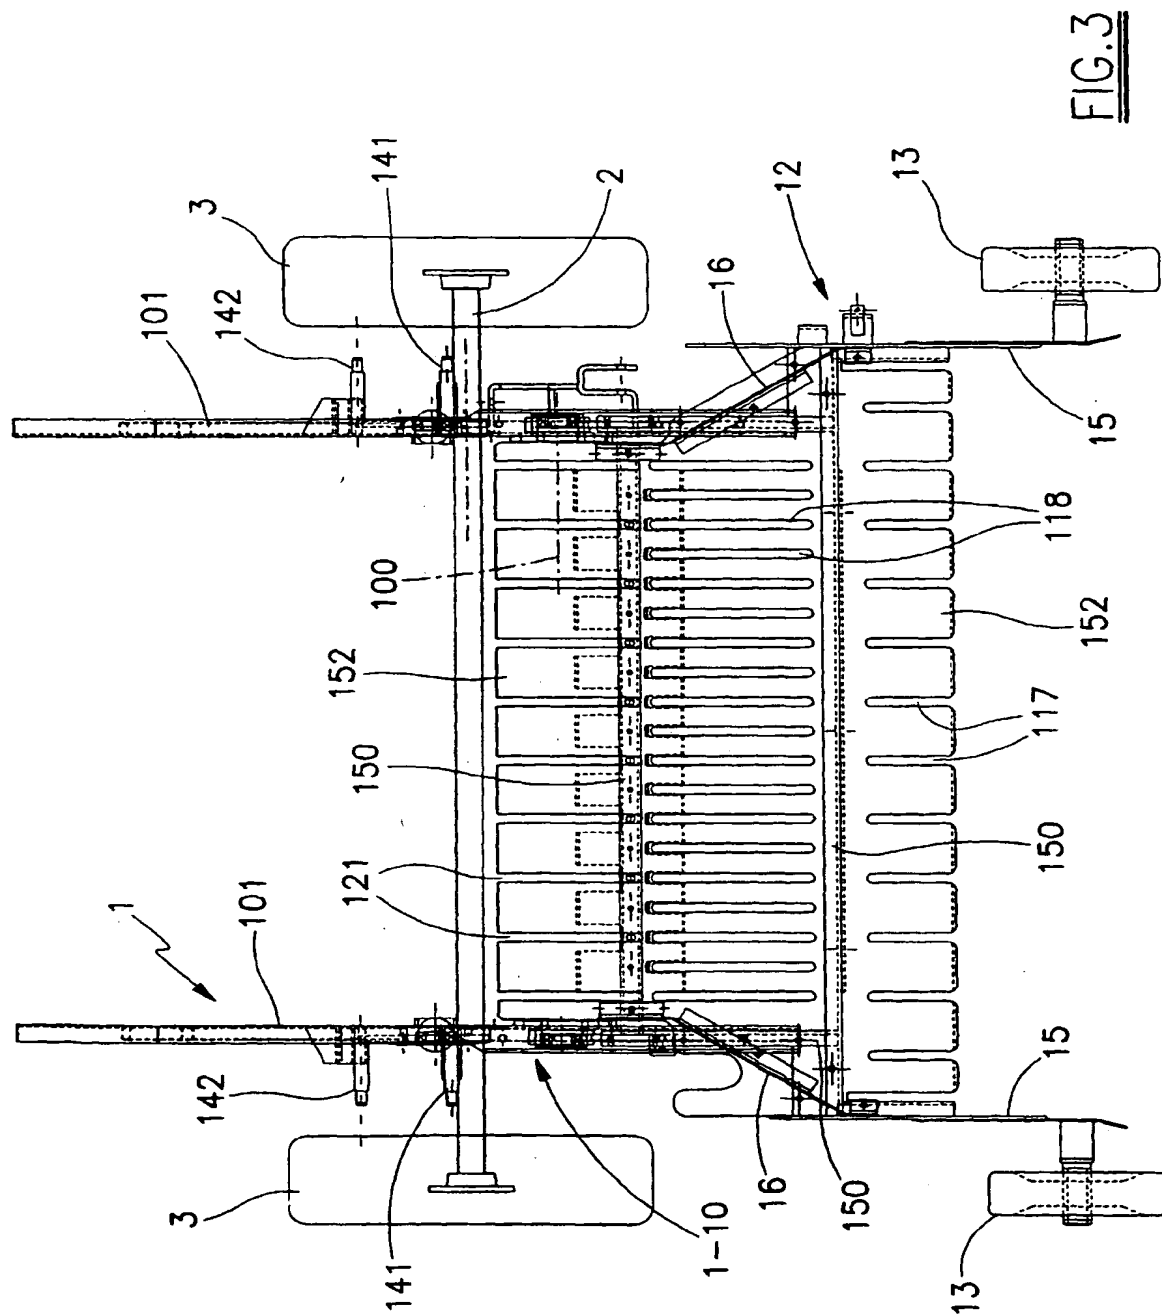

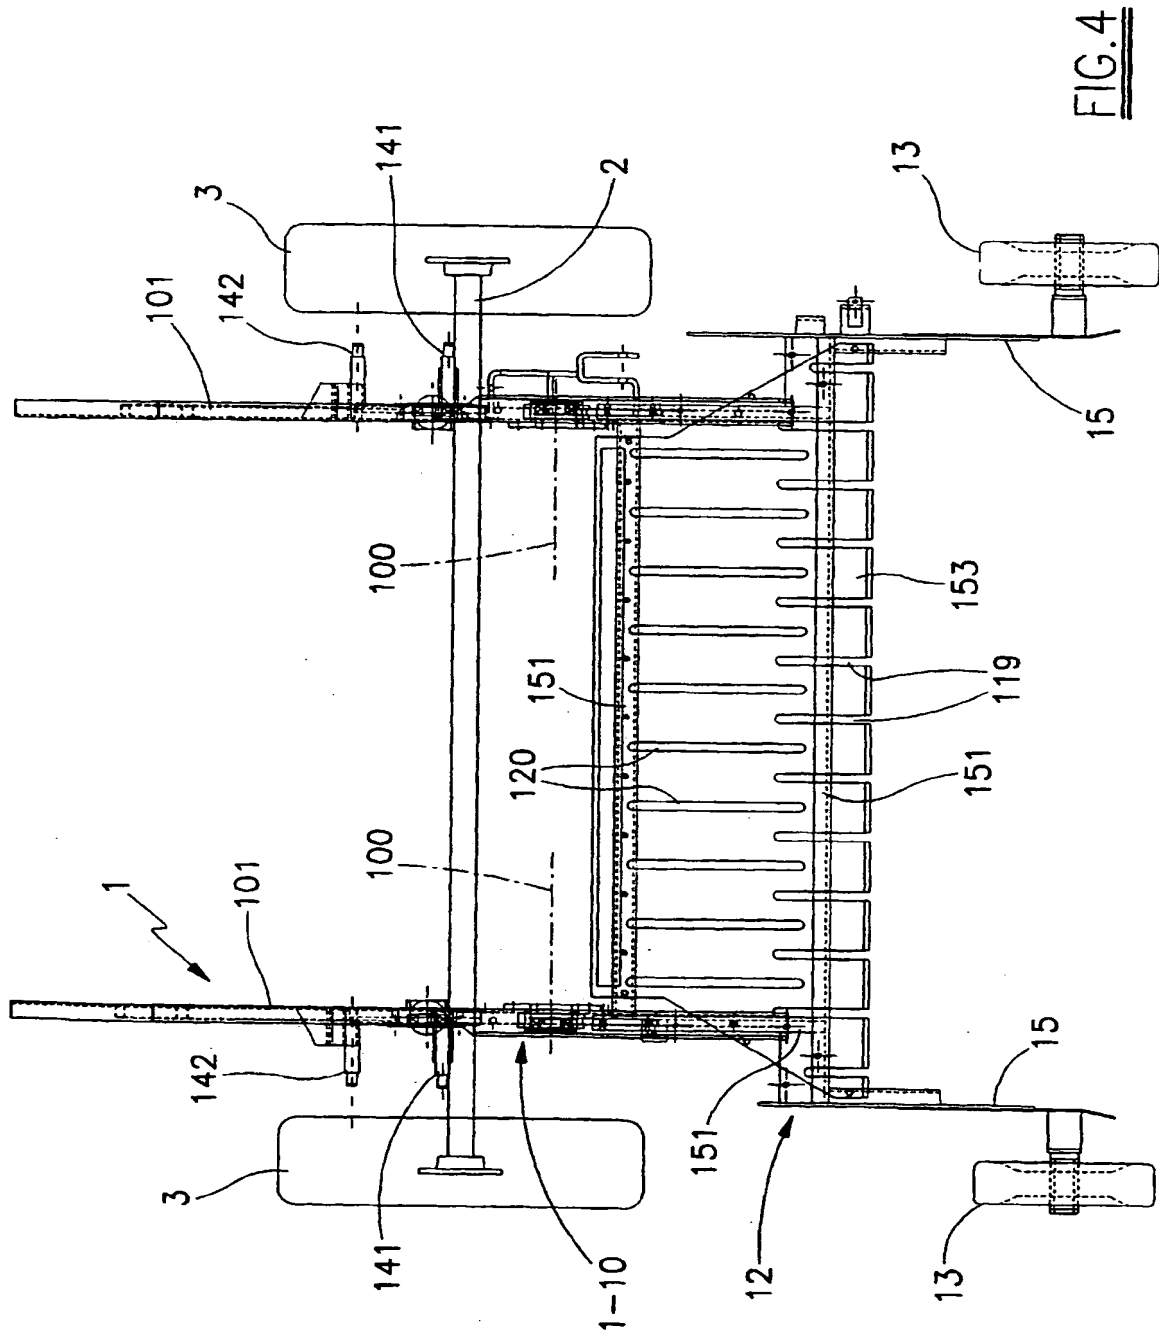


FIG. 4

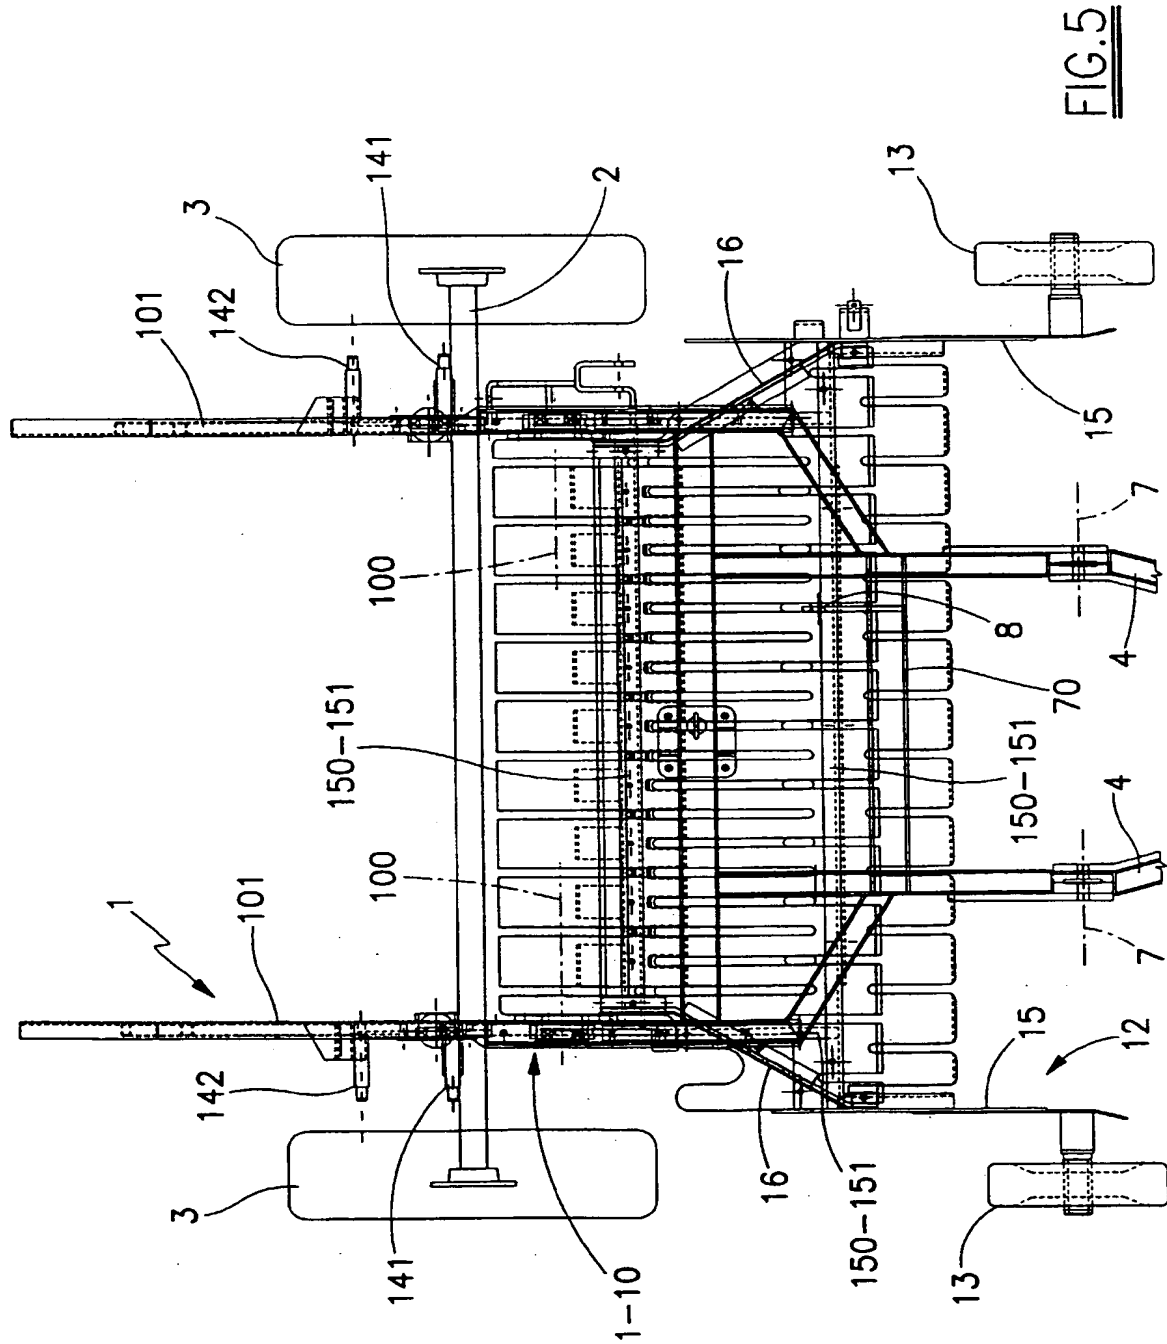
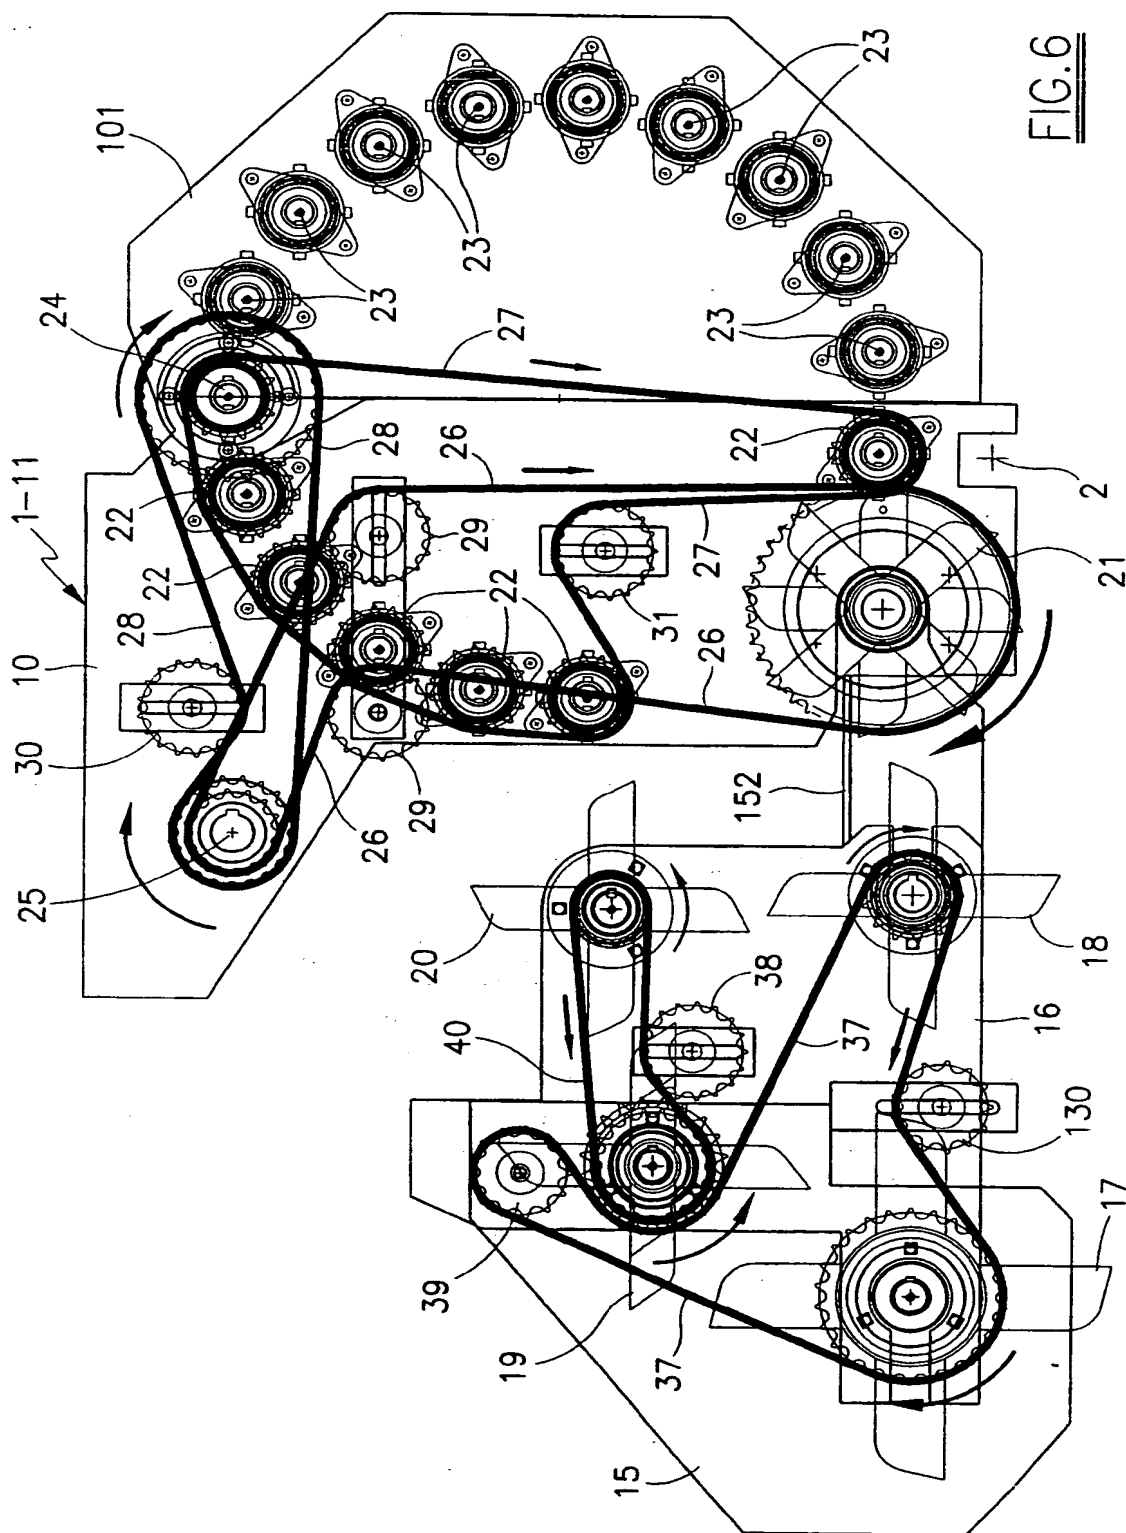
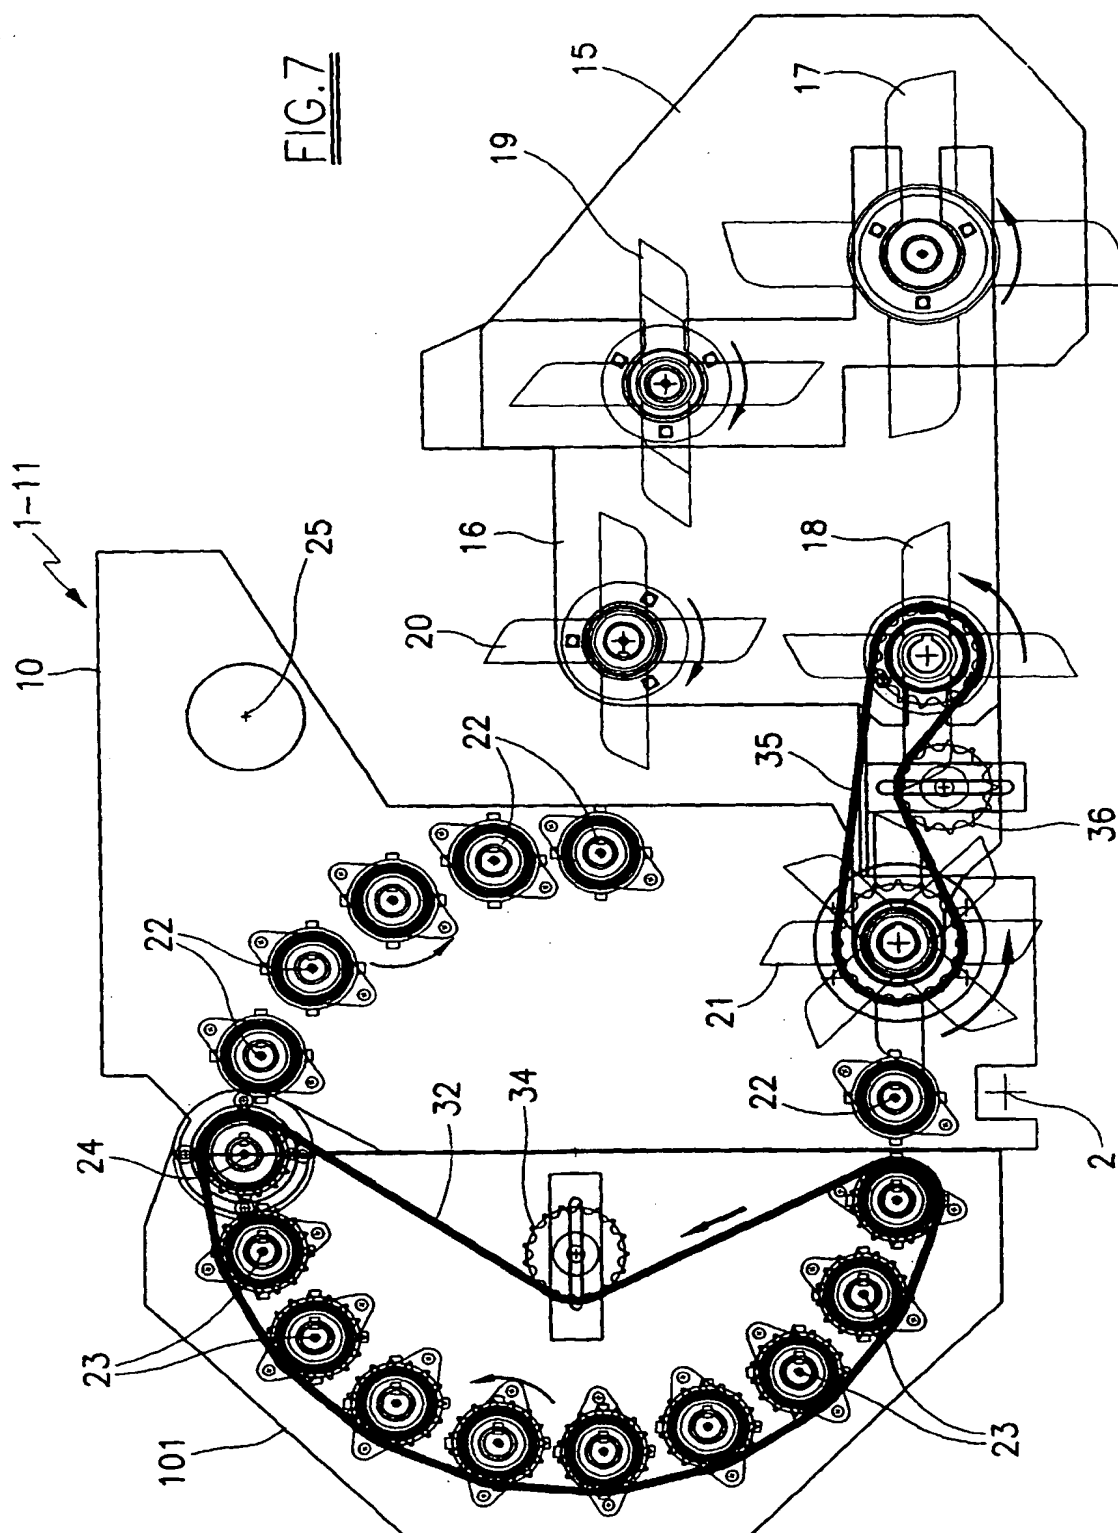


FIG. 5





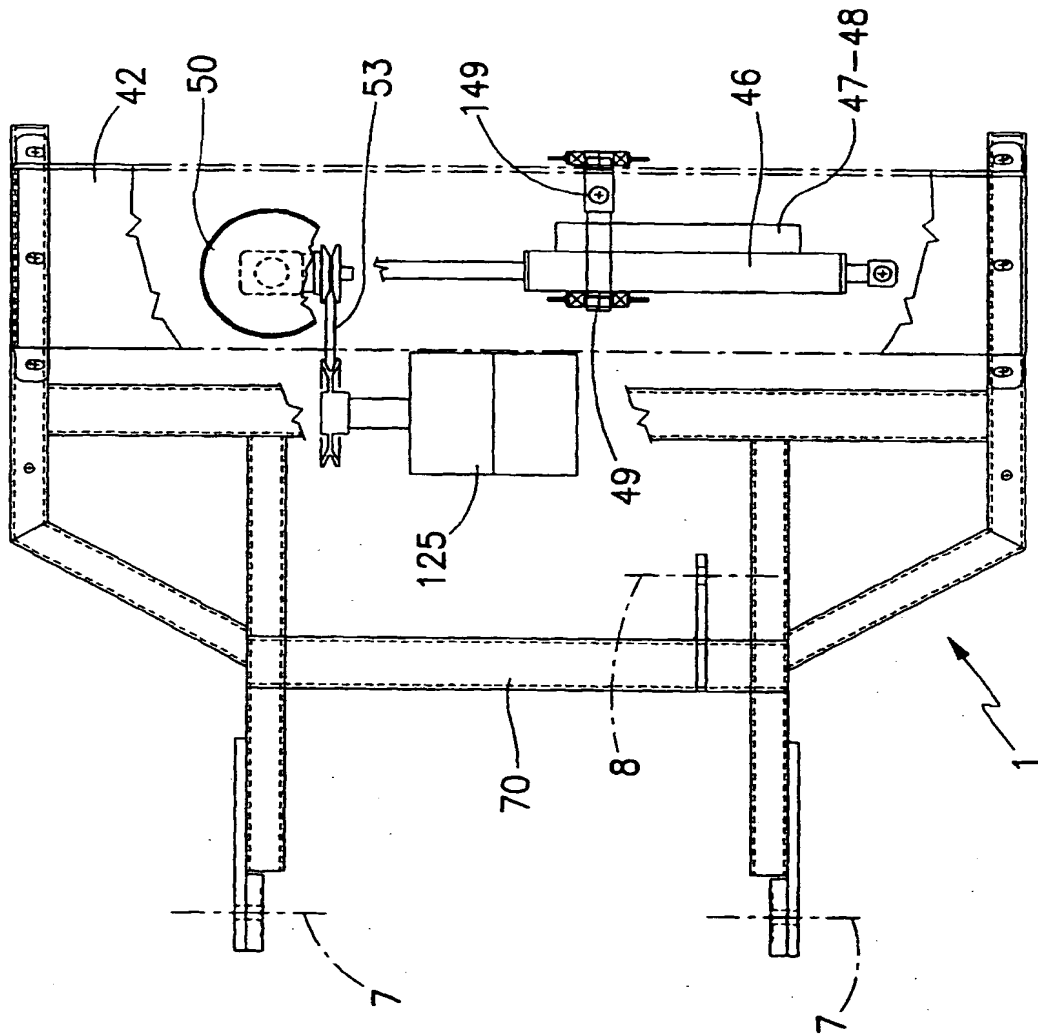
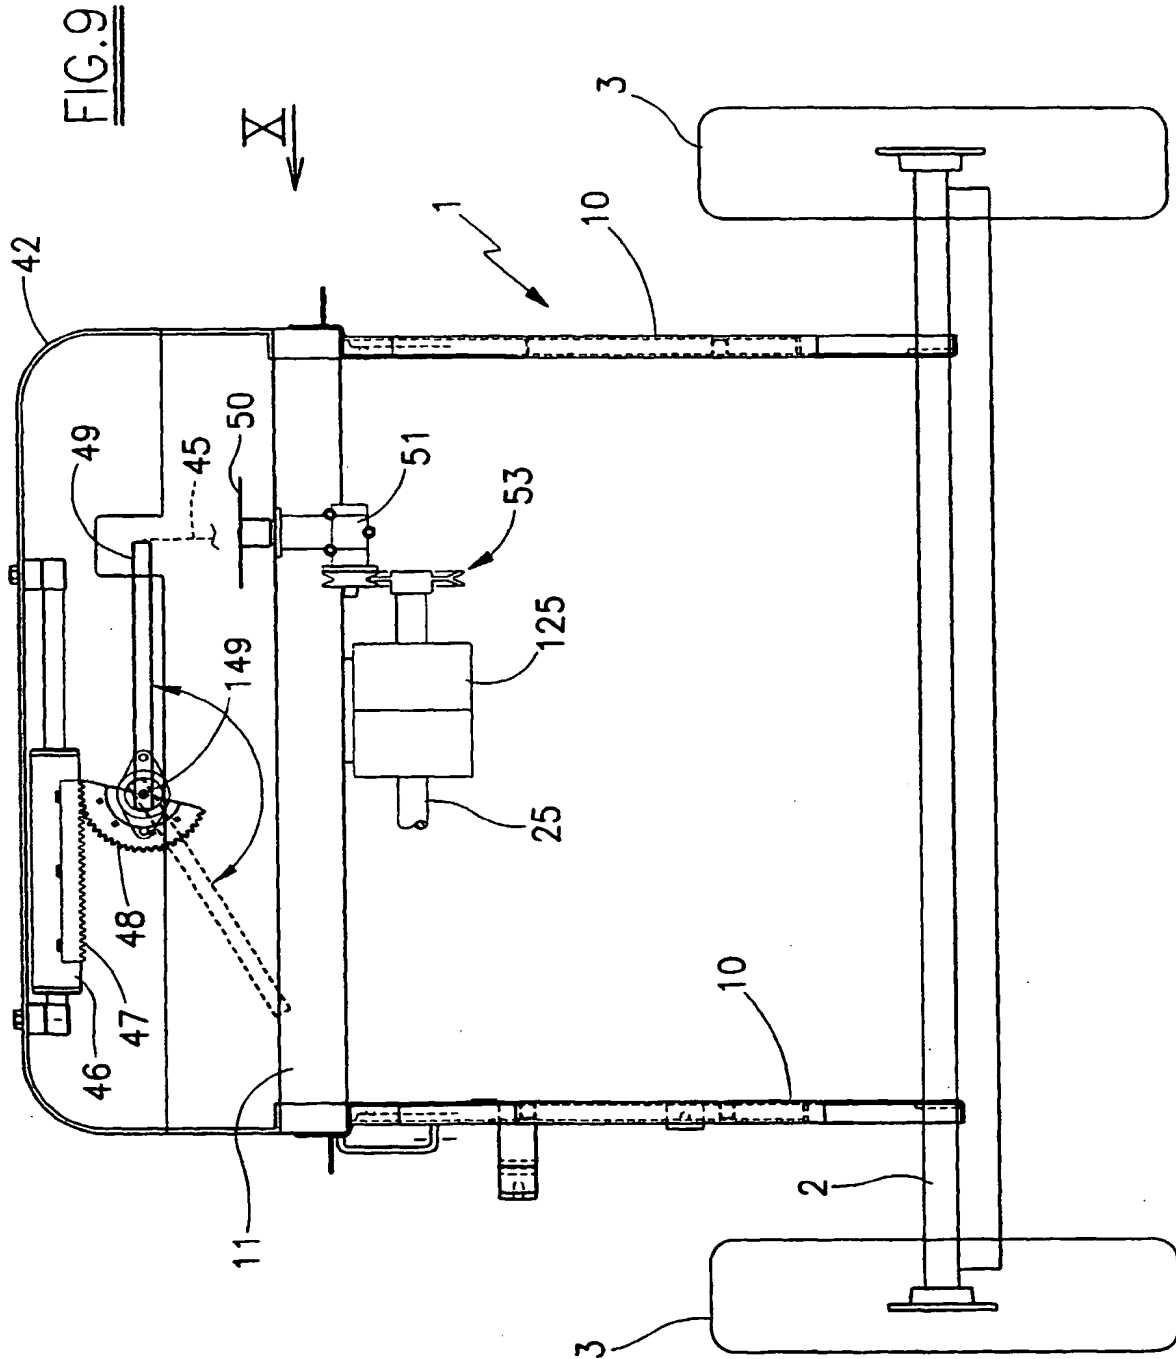


FIG. 8




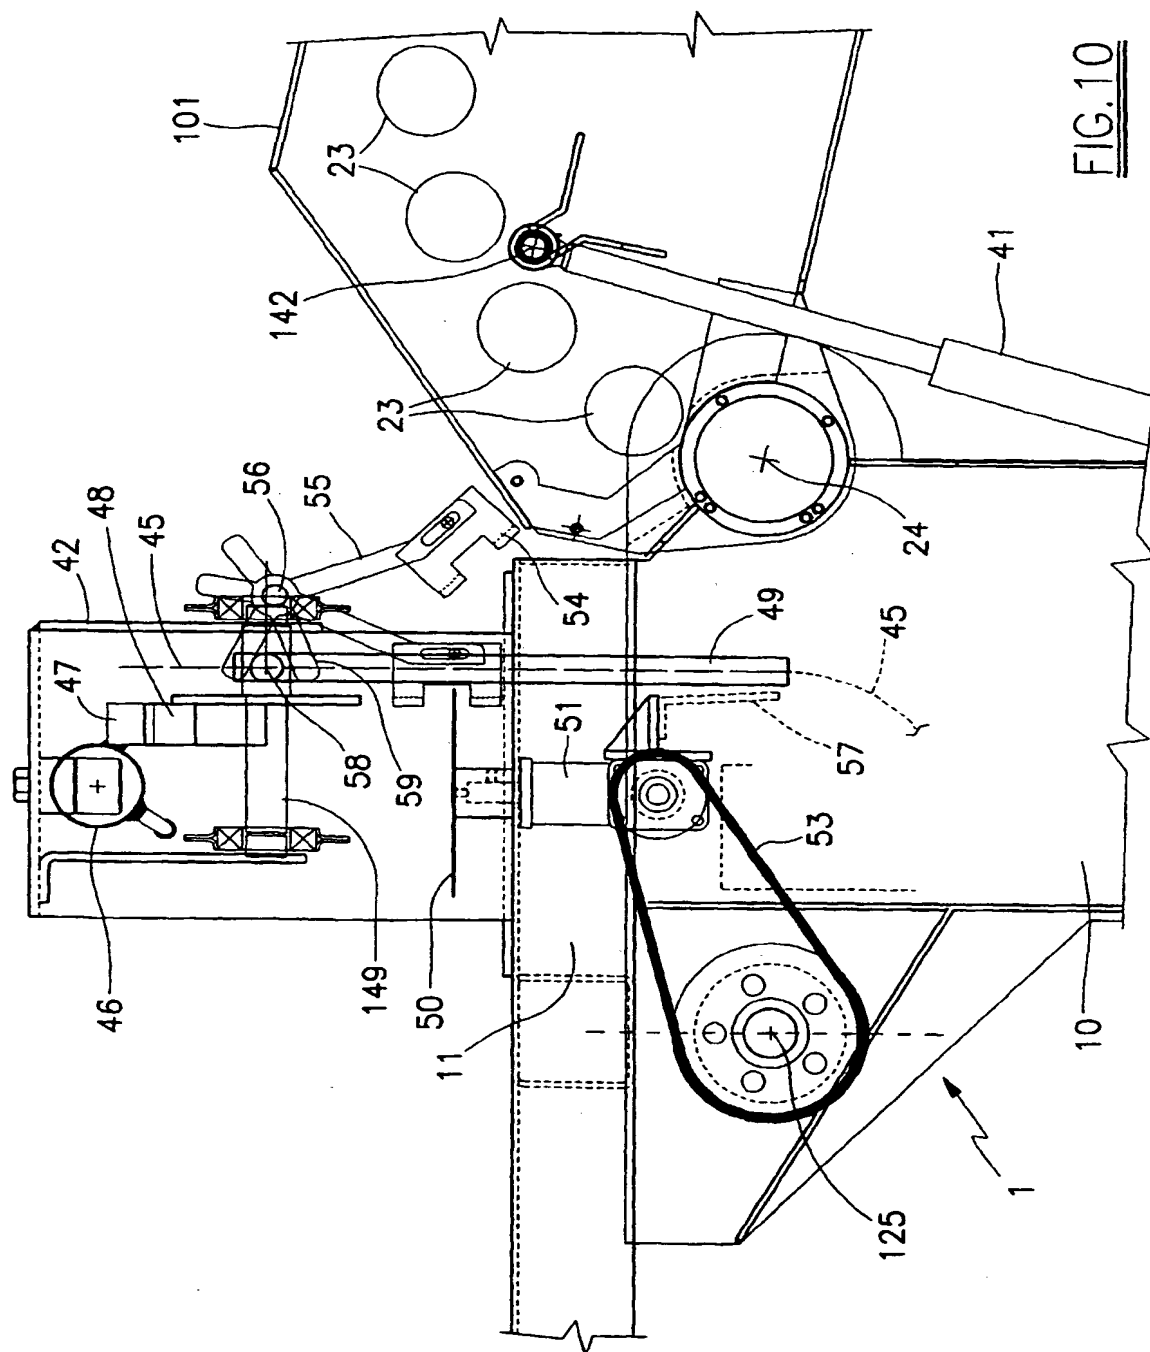


FIG. 10



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 029 441 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
27.12.2000 Bulletin 2000/52

(51) Int. Cl.⁷: **A01F 15/10**, A01F 15/07,
A01F 15/14, A01D 90/06

(43) Date of publication A2:
23.08.2000 Bulletin 2000/34

(21) Application number: 00200031.3

(22) Date of filing: 24.01.2000

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Ferramola, Virginio**
42045 Luzzara, Regio Emilia (IT)

(74) Representative:
Corradini, Corrado et al
Studio Ing. C. CORRADINI & C. S.r.l.
4, Via Dante Alighieri
42100 Reggio Emilia (IT)


(30) Priority: 17.02.1999 IT RE990022

(71) Applicant: **Tigieffe - S.R.L.**
42045 Luzzara (Regio Emilia) (IT)

(54) Baling machine for pruning residues

(57) A baling machine for pruning residues, comprising a frame (1) mounted on wheels (3) and provided with a drawbar (4) for connection to a tractor, and on which there are provided a unit (12) for gathering pruning residues from the ground, a rearward compacting chamber, and a bale binding unit, said gathering unit comprising at least one transverse lower pronged rotor (17, 18) rotated in the opposite direction to the machine

advancement direction (A), and at least one transverse upper pronged rotor (19, 20) rotated in the opposite direction to the preceding and having its prongs offset from those of the lower rotor, between said two rotors there being defined the channel for feeding the pruning residues to the compacting chamber.

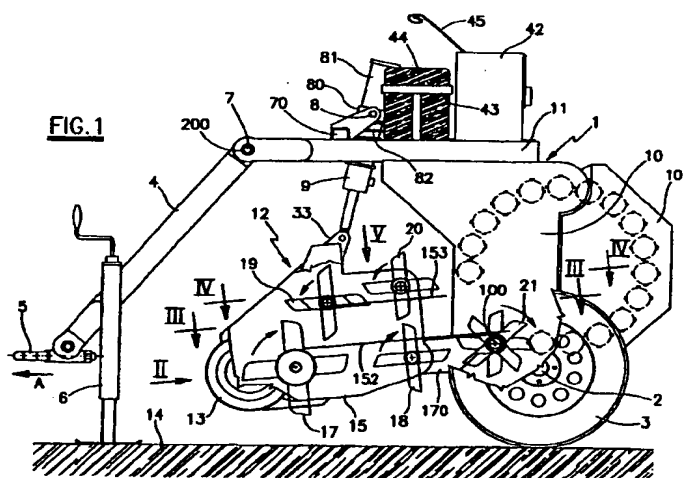

EP 1 029 441 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 20 0031

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	FR 2 520 971 A (MURATORI SPA) 12 August 1983 (1983-08-12)	1,3,6-9	A01F15/10 A01F15/07 A01F15/14 A01D90/06
Y	* page 2, line 28 - page 6, line 9 * * figures *	4,5,10	
Y	EP 0 121 279 A (SPERRY NV) 10 October 1984 (1984-10-10) * page 6, line 9 - line 13 * * figures 1,2 *	4,5	
Y	GB 2 038 706 A (POMAR COMA J M) 30 July 1980 (1980-07-30)	10	
A	* page 1, line 84 - page 2, line 16 * * figures 1-3 *	11	
X	FR 2 506 117 A (MESLONG ROBERT) 26 November 1982 (1982-11-26)	1,3,6,7,9 11	
A	* page 2, line 29 - page 7, line 35 * * figure 1 *		TECHNICAL FIELDS SEARCHED (Int.Cl.7)
A	DE 34 45 050 A (THOMANN HANS) 12 June 1986 (1986-06-12) * page 7, line 24 - page 10, line 21 * * figures *	1,3,5	A01F A01D
A	EP 0 803 184 A (DEERE & CO) 29 October 1997 (1997-10-29) * column 4, line 28 - column 8, line 35 * * figures 1-3 *	5-7,9	
A	US 4 176 596 A (SACHT HANS O) 4 December 1979 (1979-12-04) * column 6, line 10 - line 15 * * figure 1 *	4,5	
-/--			
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 30 October 2000	Examiner Baltanás y Jorge, R
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 20 0031

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	DE 25 25 491 A (WELGER GEB) 16 December 1976 (1976-12-16) * page 5 - page 7 * * figures *	10, 11	
A	EP 0 157 898 A (KLOECKNER HUMBOLDT DEUTZ AG) 16 October 1985 (1985-10-16) * page 11, line 23 - page 17, line 16 * * figures 1-38 *	10	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Place of search THE HAGUE		Date of completion of the search 30 October 2000	Examiner Baltanás y Jorge, R
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (P4/C01)



European Patent
Office

Application Number

EP 00 20 0031

CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claim(s):
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

- ☒ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
- ☐ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:



European Patent
Office

**LACK OF UNITY OF INVENTION
SHEET B**

Application Number
EP 00 20 0031

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. Claims: 1-5

Improved feeding mechanism for the pressing chamber of a pruning residues baler.

6-8

Rear door for a round baler.

9

Improved roller for the configuration of the pressing chamber of a round baler.

2. Claim : 10 11

Improved twine delivery system for a round baler.

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 00 20 0031

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

30-10-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
FR 2520971 A	12-08-1983	IT 1157807 B	18-02-1987
		DE 3302706 A	18-08-1983
EP 0121279 A	10-10-1984	CA 1227083 A	22-09-1987
		DE 3479954 D	09-11-1989
		US 4549480 A	29-10-1985
GB 2038706 A	30-07-1980	ES 476762 A	01-06-1979
		DE 3000908 A	24-07-1980
		FR 2446065 A	08-08-1980
FR 2506117 A	26-11-1982	NONE	
DE 3445050 A	12-06-1986	NONE	
EP 0803184 A	29-10-1997	DE 19616999 A	30-10-1997
		CA 2199165 A	27-10-1997
		US 5848523 A	15-12-1998
US 4176596 A	04-12-1979	DE 2443838 A	01-04-1976
		DK 681074 A,B,	14-03-1976
		FR 2284276 A	09-04-1976
		GB 1490384 A	02-11-1977
		IT 1042442 B	30-01-1980
		US 4009653 A	01-03-1977
		US 4119026 A	10-10-1978
DE 2525491 A	16-12-1976	NONE	
EP 0157898 A	16-10-1985	DE 3414080 A	24-10-1985
		AT 35079 T	15-07-1988
		JP 1585199 C	31-10-1990
		JP 2006486 B	09-02-1990
		JP 60217825 A	31-10-1985
		US 4557189 A	10-12-1985

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82